

Storage Tanks

TrioSafe 750 to 1500 liters (EN 13341)
with 240 mm inspection opening

DEHOUST

Brief Description

TrioSafe series double-walled storage tanks are the perfect solution for storing various oils, photochemicals, concrete admixtures and AdBlue.

The 240 mm standard inspection opening is ideal for inserting a submersible pump, agitator or as a cleaning opening, for example.

The TrioSafe storage tank consists of an inner tank made of HD-PE and a collection tray also made of HD-PE. The translucent plastic wall eliminates the need for an additional leak detection system.

Inner tanks comply with EN 13341.

The individual tank sizes are equipped with the following connections:

750 / 1000 liters: 2 x screw connection with 2" IT, 1 x 240 mm inspection opening with cover
1100 / 1500 liters: 3 x screw connection with 2" IT, 1 x 240 mm inspection opening with cover

The tanks have been designed to withstand a 30-minute fire without leaking.



TrioSafe 750 / 1000

TrioSafe 1100 / 1500

Installation

The tanks can be installed in buildings that do not have an on-site containment area.

The tanks must be placed entirely on a horizontal, level, rigid and smooth floor.

The distance to walls must be at least 5 cm.

Local installation regulations must be complied with.

Approved media

- Diesel fuel in accordance with DIN EN ISO 590
- Fatty acid methylester in accordance with DIN EN 14214 (biodiesel)
- Lubricating oils, hydraulic oils, heat transfer oils Q, new and used, with flash temperature $>55^{\circ}\text{C}$
- Photographic chemicals in use concentration, new and used
- Ethylene glycol as radiator antifreeze
- Concrete admixtures and mortar admixtures with a maximum density of 1.15 g/cm^3
- AdBlue (urea solution 32.5 %)
- Vegetable oils such as cottonseed, olive, rapeseed, castor or wheat germ oil


For more information please visit www.dehoust.com and enter the item number.



The details in this printed matter are subject to change. Technical details may be changed without notice. In some case enquiries must be made regarding the suitability of the tanks. The national standards and set up requirements should be observed.


Dimensions and weight

Storage tank 750

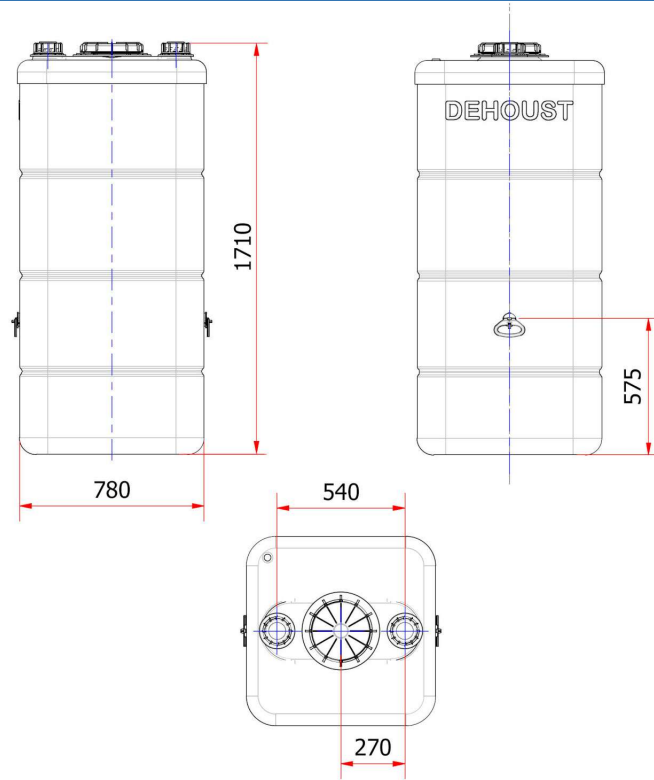

Item no.	Description	Weight
961509	Storage tank TrioSafe 750 (with 240 mm inspection opening)	44 kg


Storage tank 1000

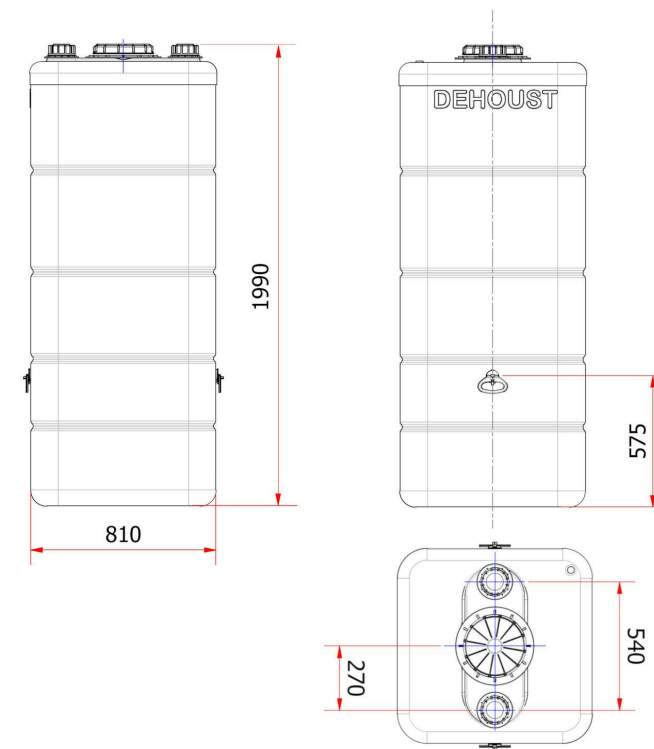

Item no.	Description	Weight
961515	Storage tank TrioSafe 1000 (with 240 mm inspection opening)	56 kg


Dimensions and weight

Storage tank 1100

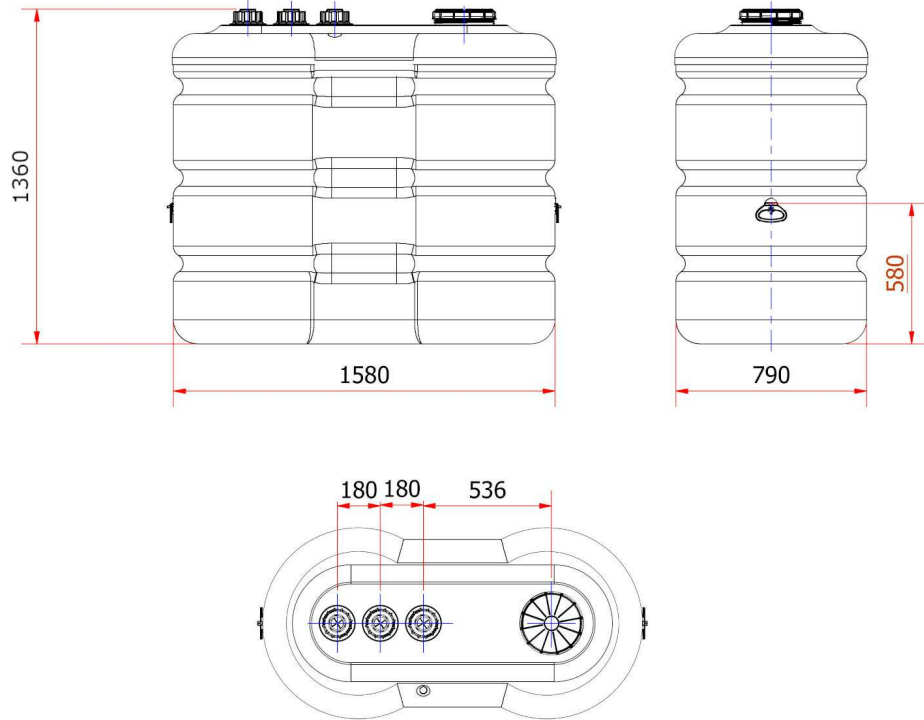

Item no.	Description	Weight
961546 □	Storage tank TrioSafe 1100 (with 240 mm inspection opening) □	62 kg

Storage tank 1500

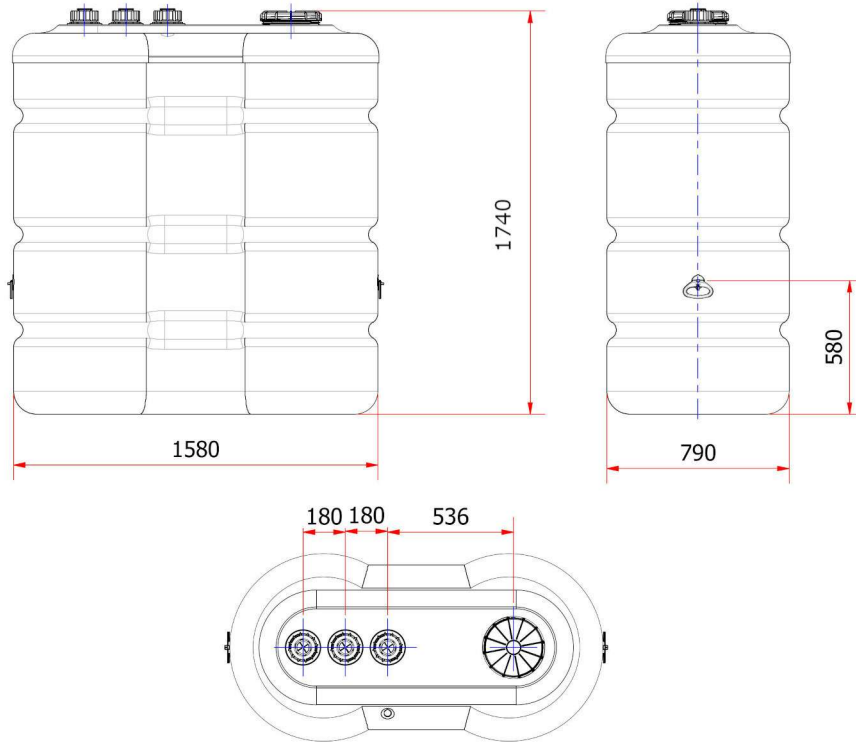

Item no.	Description	Weight
961536 □	Storage tank TrioSafe 1500 (with 240 mm inspection opening) □	76 kg