

Double wall tanks by Dehoust

# Safe storage of heating oil



- ▶ Optimal space utilization
- ▶ Two different heights, suited for basements with different headrooms
- ▶ Leakage indicator and gauge
- ▶ Dual-sided galvanized steel sheet, securely welded and edged using most up-to-date machines
- ▶ Easily manoeuvred within the cellar
- ▶ High quality polyethylene with diffusion barrier (PE-PLUS)
- ▶ For single or multiple tank installation



**DEHOUST**

[www.dehoust.com](http://www.dehoust.com)

## Storage of heating oil: safe and easy

**Venting at the first or the last tank**

**Leakage indicator**

**Dual-sided galvanized steel sheet, securely welded and edged using most up-to-date machines**

**Monitoring of each tank during filling**


**Bracket tightly screwed to the tank, enabling transport by means of high-lift truck, hence easy installation of the tank system**



Dimensions PE-Kombi Tanks					
Description	Item	Length	Width	Height	Weight
PE-Kombi 720 Plus	961201	1.100 mm	700 mm	1.200 mm	68 kg
PE-Kombi 1000 Plus	961202	1.100 mm	700 mm	1.600 mm	84 kg

**Floating withdrawal device**

**Double-walled filling system containing filling, venting and outlet system**

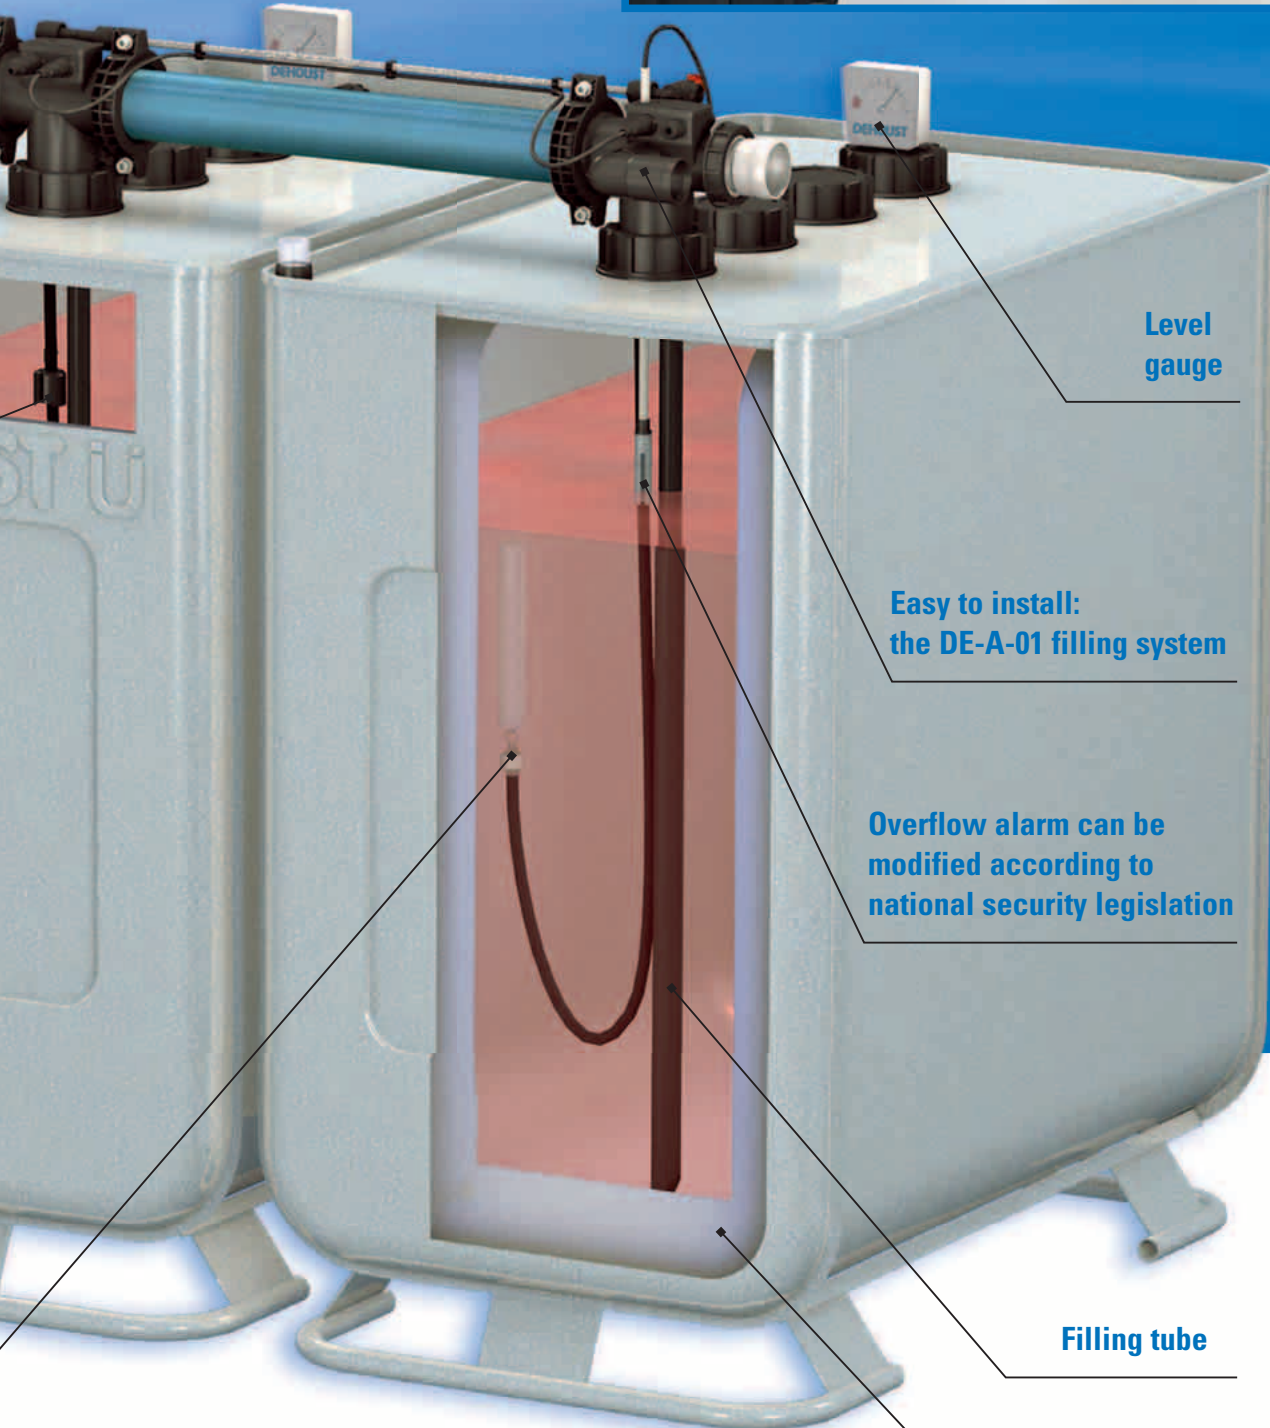

**Level gauge**





**Easy to install:  
the DE-A-01 filling system**

**Overflow alarm can be  
modified according to  
national security legislation**


**Filling tube**

**Inner tank corrosion free,  
made of high quality poly-  
ethylene with diffusion  
barrier PE-Plus**


## DE-A 01 Safety Systems

Description		Item
HP Hauptpaket		952400
EP-K Erweiterungspaket		952403
UP-K Umlenkpaket		952406
S UP (quer) Sonder Umlenkpaket		952407

### Installation examples

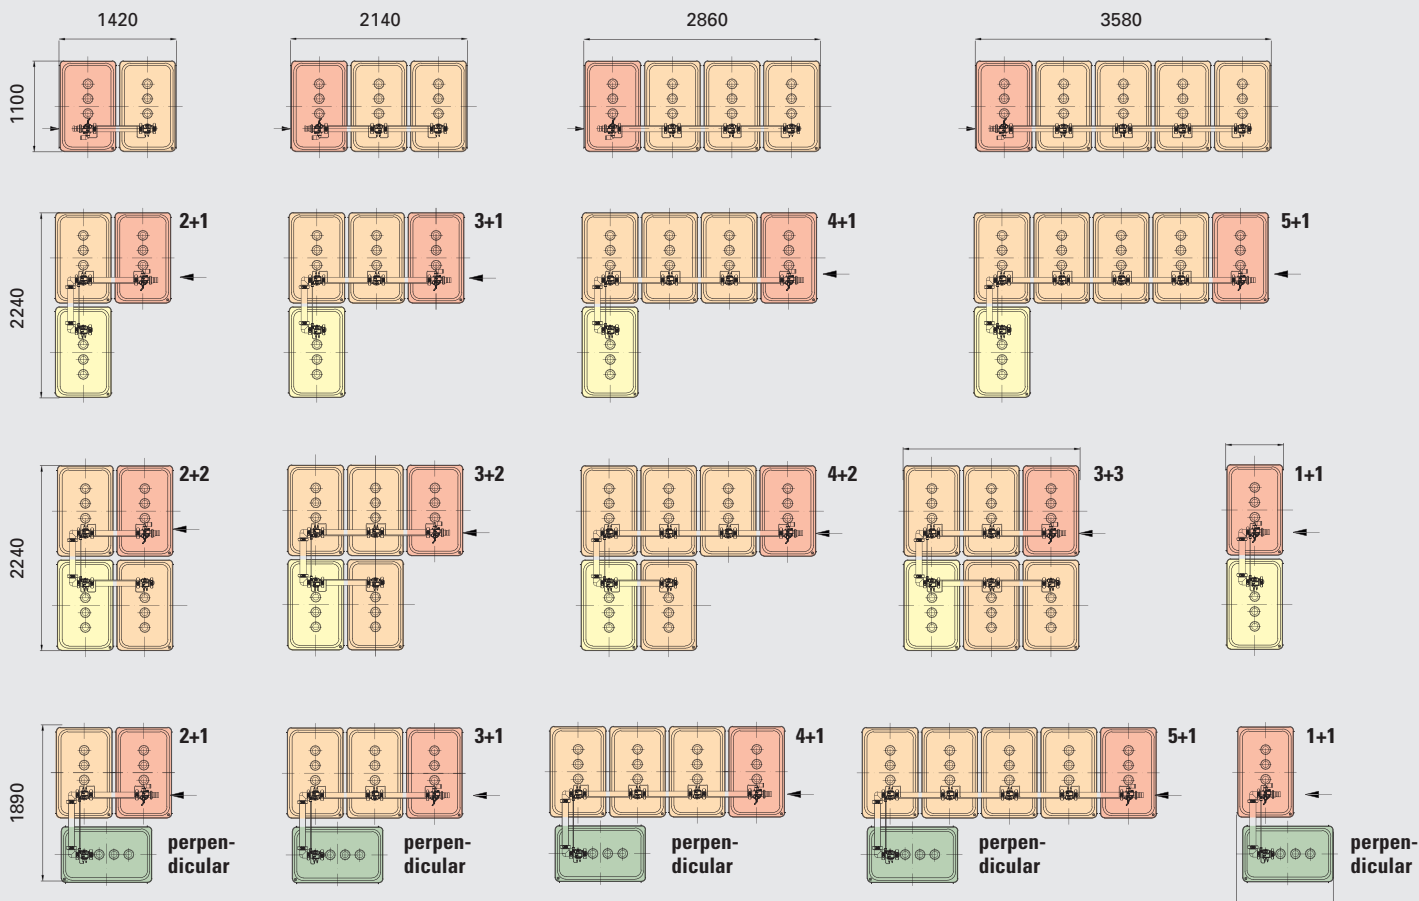

PE-Kombi Tanks can be installed in the boiler room.

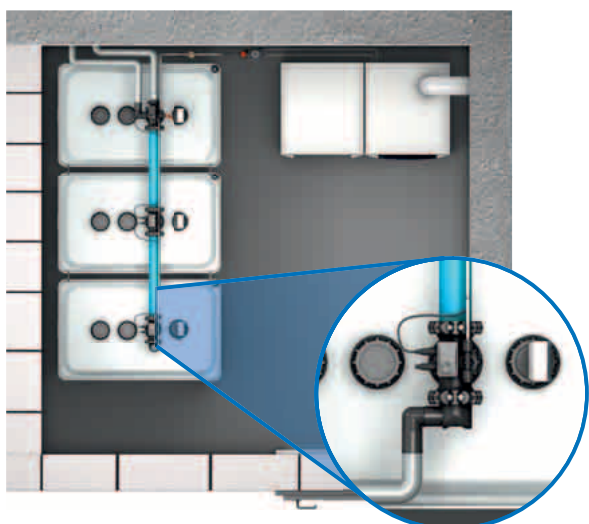

The information given in this brochure corresponds to the present state of knowledge. Change reserved. Without liability regarding legal regulations on local and national level.



Dehoust GmbH

D-69181 Leimen

Gutenbergstrasse 5-7

Tel. +49 (0) 62 24 / 97 02-10

Fax +49 (0) 62 24 / 97 02-70

info@dehoust.de · www.dehoust.com